



## BC4200 Series Hazardous Area Exit Light

Spec Sheet

### Overview

The Tormin BC4200 Exit Light is a maintained exit sign suitable for interior and exterior installation and is offered with a choice of signage, with or without direction indication arrows.

### Features & Benefits

- Maintained Illuminated Exit sign with emergency switch over (Please enquire about emergency option.)
- Integrated LED Indicator.
- Suitable for operation in low and high temperature environments.
- Suitable for corrosive environments.
- Choice of mounting fixings with angle adjustment for flexible and easy installation.
- Impact and vibration resistant.
- 5 Year warranty.



## Technical Specification

Description: BC4200 Series Hazardous Area Exit Light

Recommended Product Location: Hazardous areas

PRODUCT DETAILS	
Ex mark	Ex db e IIC T6 Gb, Ex tb IIIC T80°C Db, IP66
Voltage	100-240 VAC 50/60Hz
IP Rating	IP66
Typical Lumens per watt	150lm/W
Colour Rendering	>0.70
LED Module	LUMILEDS
Beam angle	/
Operating Temperature	-20°C to +40°C
Colour Temperature	5000k
Power Factor	>0.95
Driver	/
Dimension	374x165x65.5mm
Warranty	5 Year Repair / Replace Warranty
Cable Entry	G3/4"
Dimming Control	/
Net Weight	3.3KG'S

PRODUCT OPTIONS	
Occupancy Sensor	N/A
Light level sensor	N/A
Remote Programmable Sensor	N/A
High borosilicate glass front	Fitted as standard
RGB	N/A
18-43VAC/18-55VDC	N/A
Emergency	1W
Fixed Bracket Mounting	✓


### Ambient Temperature / Temperature Group

Circuit Watts	TA ≤55°C
/	T6


### Performance Chart

LED POWER	CIRCUIT WATTS	TYPICAL LUMENS
2.64w	3w	450lm
EMERGENCY WATTS	EMERGENCY	
40w	120min	

### Diagram of BC4200

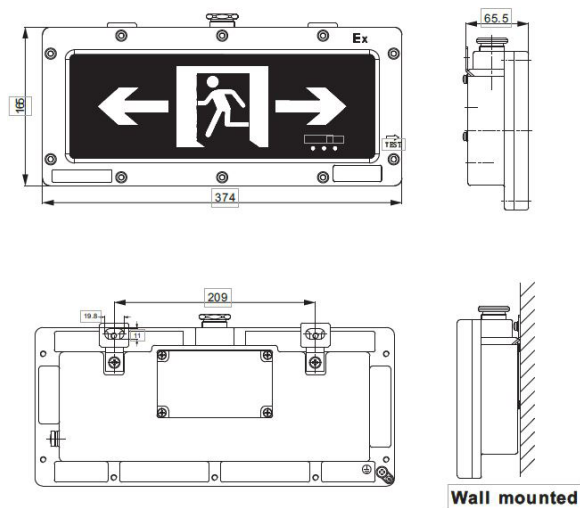

### Optional sign types

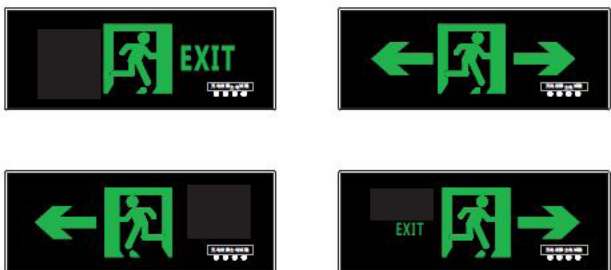

The Tormin BC4200 is covered by our 5 Year repair/replace Warranty. Warranty upgrade packages available. UK purchases, warranty handled through Carbon8Lighting.

www.carbon8lighting.co.uk  
01256 300031  
sales@c8l.co.uk

**CARBON8**  
LIGHTING

